


# Sullivan Palatek®

*“The Ultimate Performance Rotary Screw Air Compressor”*

- Compact design.
- New rotor profile.
- Reliable power transmission.
- 2-year warranty.  
(Air end)

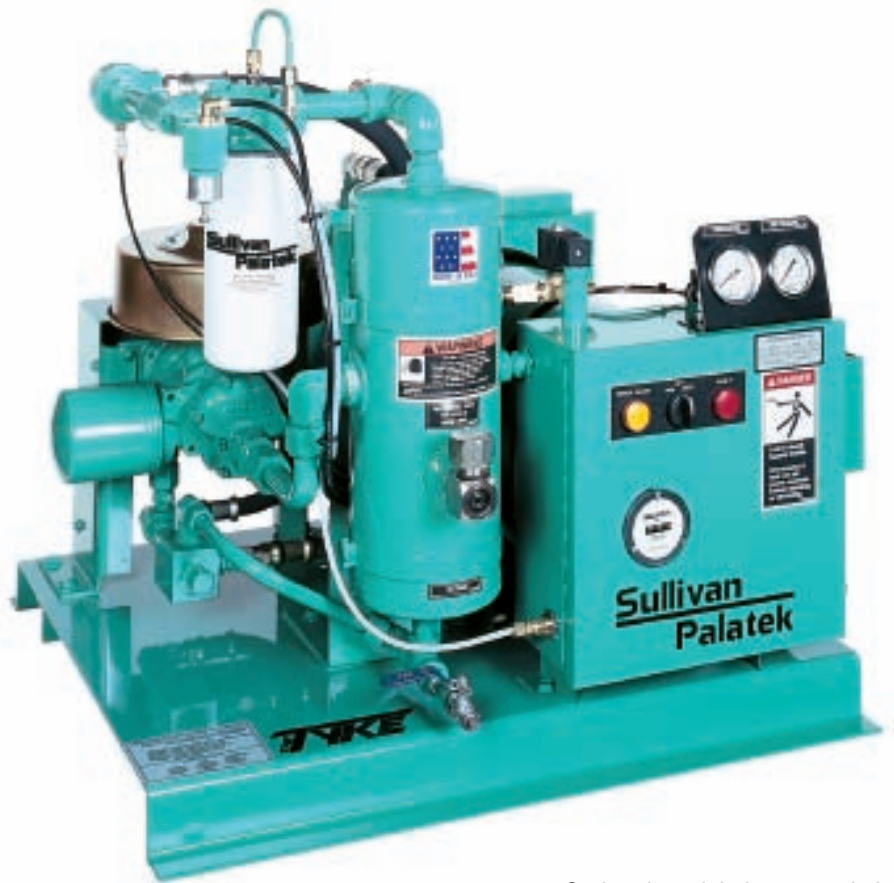

Optional modulation control shown

## MODEL 5, 7.5, 10 HP

Unit comes complete with starter, air cooled lube cooler/aftercooler, protective devices for high temperature and motor overload shutdown

## STANDARD FEATURES

### COMPRESSOR:

## 5, 7.5, 10 HP AIR COMPRESSORS.

Lube flooded rotary screw, continuous duty, industrial air compressor.

### ELECTRIC MOTOR:

208/230/460/575 volt, 3-phase, open drip motor. Single phase 230 volt 5 & 7.5 HP also available.

### MOTOR STARTER:

Full voltage magnetic starter with 110 volt control.

### CONTROLS:

Automatic control (dual control) is standard.

### INSTRUMENTATION:

Line pressure gauge, lube temperature gauge, hour meter.

### COOLING SYSTEM:

Air cooled lube cooler / aftercooler with Palasyn 45, 4000 hour synthetic lubricoolant. Spin on type lube filter and separator for ease of maintenance.

### AIR FILTER:

Dry type replaceable.


### OPTIONS:

Enclosure, modulation control, moisture separator, separator differential pressure gauge, platform mount and tank mounting. Consult factory for accessories not listed. Specifications subject to change without notice.

## GENERAL SPECIFICATIONS

Lube Reservoir Capacity	1 Gal.
Length	30"
Height	26"
Width	26 <sup>1</sup> / <sub>4</sub> "
Weight 5 HP	230
Weight 7.5 HP	300
Weight 10 HP	350
Discharge Conn.	<sup>3</sup> / <sub>4</sub> " F.P.T.

Sold and Serviced By:

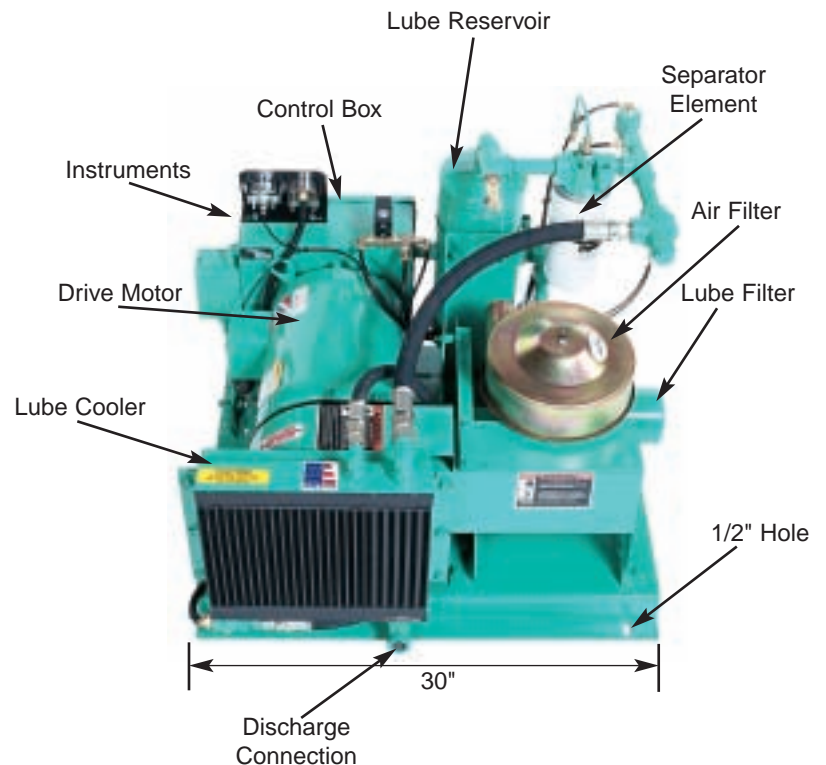

Optional modulation control shown

**Sullivan**  
**Palatek**